



BellAliant



Your new
modem set-up
guide

Installation



1. Power down

Disconnect the power cable from your existing modem and set it aside for shipping.



2. Hook up


Align your new modem next to your old modem. Unplug all cables from your old modem and reconnect them to the same ports on your new modem.

Actiontec R1000H



- Coax cable
Connects the TV receiver to the modem
- Ethernet Cable
Connects to computers, TV receivers and other networked devices
- Ethernet Cable
Connects Fibre Optic box to Modem
- Power Supply
Connects to outlet

Actiontec R3000

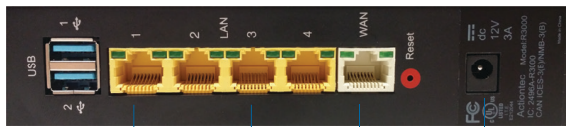

- Ethernet Cable
Connects to computers, TV receivers and other networked devices
- Ethernet Cable
Connects Fibre Optic box to Modem
- Power Supply
Connects to outlet



3. Power up

Connect the new power cord into an electrical outlet and plug the other end into your new modem. Before proceeding to the next step, wait for the “Internet” light to turn green, which should happen after a few minutes.



4. Reset

If you have Fibe™ TV, reset your receivers by holding down the power button for 5 seconds or unplugging the power cord and reconnecting it again.

Your new modem is now installed.

Wi-Fi setup



1. Connect

On your mobile device or computer, go to the wireless networks menu, select your Fibe network and enter your password. You'll find the name and password of your new network on the back of your new modem. You'll be able to change the name of your network afterwards.

R1000H



Wireless Internet Details:
Network Name (SSID): FIBREOP735
Password (WPA/WPA2): 2831318728

R3000



Wireless Internet Details
Network Name(2.4 GHz): FibeOP247
Network Name(5 GHz): FibeOP247-5
Password: 4MP8PKPEPP5MMM

Détails relatifs à l'accès Internet sans fil
Nom du réseau(2.4 GHz): FibeOP247
Nom du réseau(5 GHz): FibeOP247-5
Mot de passe: 4MP8PKPEPP5MMM



2. Enjoy

Once connected, open your Internet browser to validate the Internet service is working.